

# XDC3... PROPORTIONAL DIRECTIONAL VALVES

## CLOSED LOOP POSITION CONTROL




### XDC3...2

STANDARD CONNECTORS	CAP. I • 20
PROPORTIONAL SOLENOID	CAP. VIII • 11
SE3AN21RS...3	CAP. IX • 11
AM3H...	CAP. VIII • 15
AM5H...	CAP. VIII • 16
BC307...	CAP. VII • 12

The valves XDC serie 2 control the direction and the volume of the flow according to the feeding current to the proportional solenoid. The position transducer type LDVT (inductive position transducer) monitors the actual position of the spool.

In the electronic card (type SE.AN.21.RS...serie 3) the error between the actual position and the reference signal is used to obtain a greater precision of the spool positioning, reducing also considerably the hysteresis and the repeatability error of the valve. For a more accurate flow control, 2 or 3-way pressure compensators modular plate design are available.

The shown flow rates are typical for one line operation (e.g. from P to B). By using the valve with the base for capacity doubling type BC.3.07 greater capacity can be obtained.

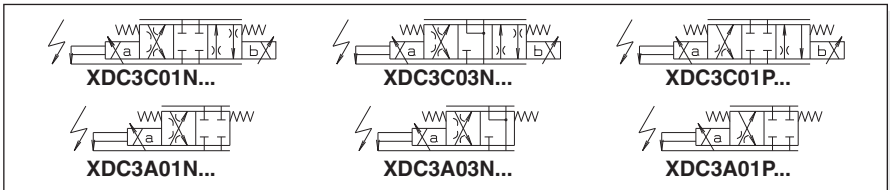

**CE** Registered mark for industrial environment with reference to the electromagnetic compatibility.

European norms: EN50082-2 - general safety norm - industrial environment;  
EN50081-1 - emission general norm - residential environment


### ORDERING CODE

<b>XDC</b>	Proportional directional valve with closed loop position control
<b>3</b>	CETOP 3/NG6
<b>*</b>	<b>A</b> = Single solenoid <b>C</b> = Double solenoid
<b>**</b>	Type of spool (null position) <b>01</b> = <b>03</b> =
<b>*</b>	Flow path control (see hydraulic symbols) <b>N</b> = symmetrical <b>P</b> = meter in (only with 01 spool)
<b>*</b>	Flow rating l/min ( $\Delta p$ 10 bar) <b>A</b> = 4 l/min <b>1</b> = 8 l/min <b>2</b> = 15 l/min <b>3</b> = 25 l/min <b>6</b> = 40 l/min ← In order to reduced the unloading pressure for rated flow version at 40 l/min we advise to use the 3 way type AM5H3V... hydrostat.
<b>F</b>	Max. current at solenoid: 1.76 A
<b>S1</b>	No variant (without connectors)*
<b>2</b>	Serial No.

Notice:  
in order to control the valve XDC3...serie 2 it need to use the electronic card SEAN21RS...serie 3, in exclusive way (See Ch. IX).

(\* All variants are considered without connectors. The connectors must be order separately. See Cap. I • 20.

### INPUT SIGNAL CURVES - FLOW RATE

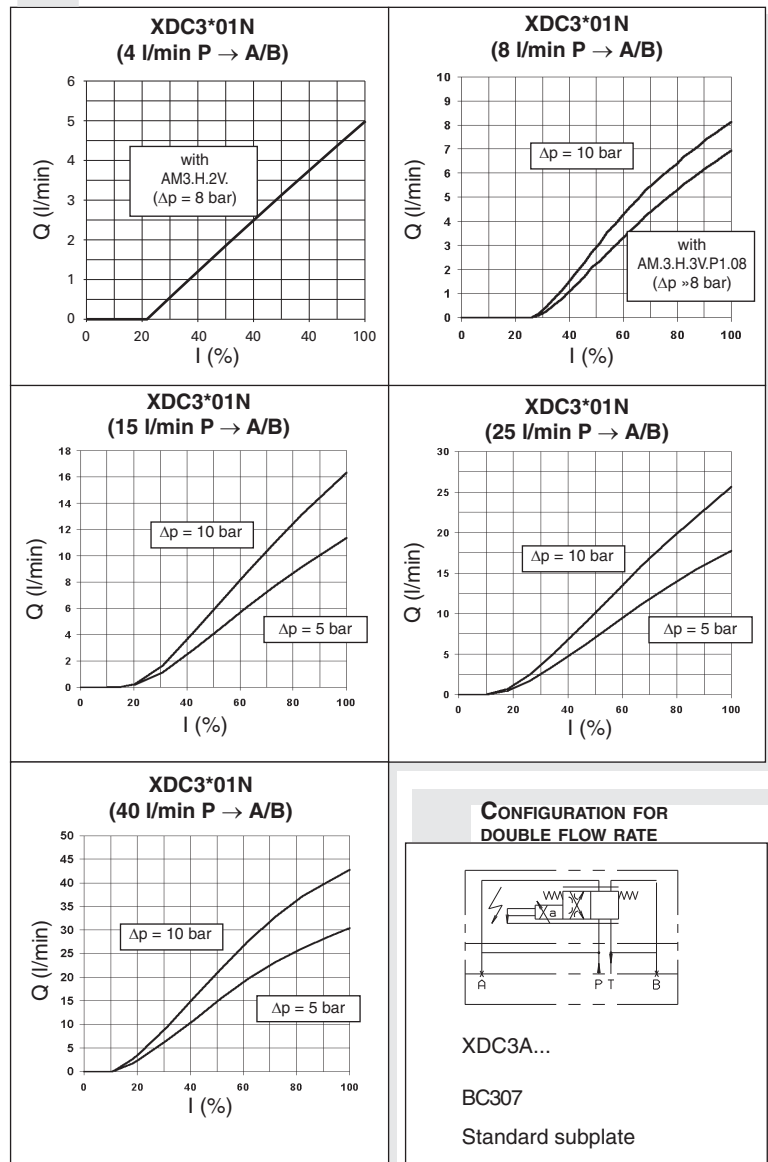

# XDC3... PROPORTIONAL DIRECTIONAL VALVES CLOSED LOOP POSITION CONTROL

## OPERATING SPECIFICATIONS OF VALVE WITH TRANSDUCER

Max. operating pressure ports P/A/B	350 bar
Dynamic pressure port T	210 bar
Static pressure port T	210 bar
Nominal flow	8 / 15 / 25 / 40 l/min
Duty cycle	Continuous 100% ED
Type of protection (depending on the connectors used)	IP 65
Performance curves	See diagrams
Fluid viscosity	10 ÷ 500 mm <sup>2</sup> /s
Fluid temperature	-20°C ÷ 75°C
Ambient temperature	-20°C ÷ 70°C
Max. contamination level	class 7 to 9 in accordance to NAS 1638 with filter $\beta_{10} \geq 75$
Weight XDC3A... (single solenoid)	1,94 Kg
Weight XDC3C... (double solenoid)	2,55 Kg

Max. current	<b>1.76 A</b>
Solenoid coil resistance at 20°C (68°F)	4.55 $\Omega$
Solenoid coil resistance when hot	7.34 $\Omega$
Hysteresis P/A/B/T with pressure compensator AM3H3V...	<1%
Transient function with stepped electrical input signals $\Delta p = 5$ bar (P/A)	
0 ÷ 100%	65 ms
100% ÷ 0	75 ms
Repeatability	<0,5%
Frequency response -3db (Input signal $\pm 25\%$ Vmax)	10 Hz

Insulation class wire	H
Weight of solenoid	0,6 Kg

**Operating specifications are valid for fluids with 46 mm<sup>2</sup>/s viscosity at 40°C, using the SE3AN21RS... serie 3 electronic control unit powered to 24V.**


## AMPLIFIER UNIT AND CONTROL

**SE3AN21RS...serie 3** - Electronic card EURO-CARD format for control of the proportional valve equipped with transducer

**AM3H2VP1 / AM3H3VP1  
AM5H3VP1 (\*)**

Hydrostats 2 or 3 way  
(\* for rated flow XDC3 version at 40 l/min) only

## TRANSDUCER ELECTRICAL CONNECTIONS

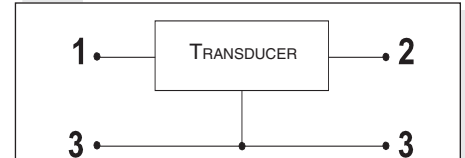


1 = Supply 18VDC ÷ 36VDC  
3 = Mass  
2 = Output 2V ÷ 10V

## POSITION TRANSDUCER SPECIFICATION

Electrical measuring system	LVDT
Nominal stroke	6 mm
Electrical connection	M12x1
Insulation (depending on the connector used)	IP65
Frequency response	500 Hz
Linearity tolerance	$\pm 1\%$

## PROPORTIONAL SOLENOID

### OVERALL DIMENSIONS

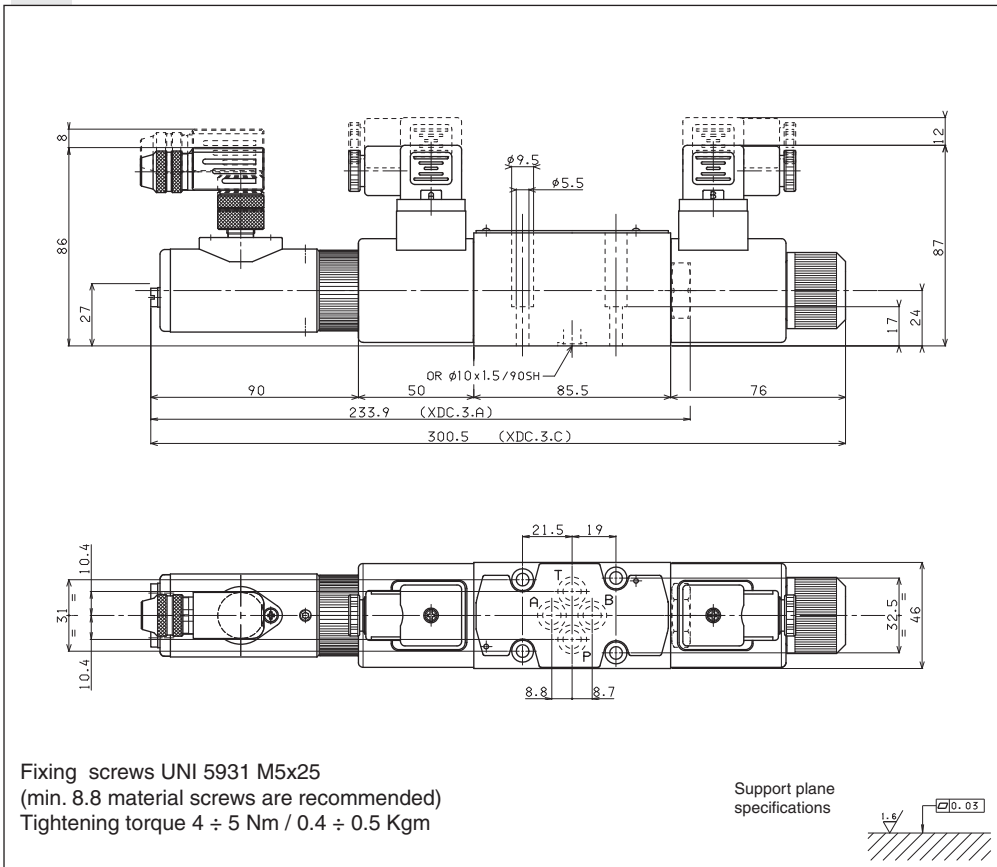

8

