


AM5H... 2 AND 3 WAY HYDROSTATS CETOP 5

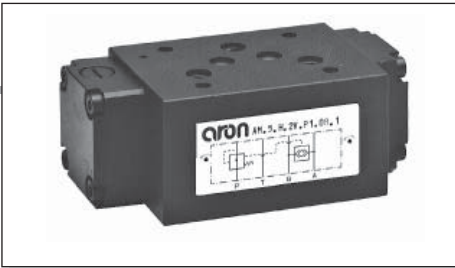

AM5H...

The 2 or 3 way pressure regulator type AM.5.H ensures a constant set flow rate in the presence of varying system load (pressure) by keeping constant the pressure drop ($\Delta p=8$ bar) in relation to the flow rate regulation. In order to achieve the direction and flow rate dual control function, it is normally used together with a proportional solenoid valve.

Max. flow AM.5.H.2V...	65 l/min
Max. flow AM.5.H.3V...	70 l/min
Max. operating pressure	350 bar
Δp adjustment	8 bar
Fluid viscosity	$10 \div 500 \text{ mm}^2/\text{s}$
Fluid temperature	$-25^\circ\text{C} \div 75^\circ\text{C}$
Ambient temperature	$-25^\circ\text{C} \div 60^\circ\text{C}$
Max. contamination level class 8 in accordance with NAS 1638 with filter $\beta_{10} \geq 75$	
Weight	2,7 Kg

ORDERING CODE

- AM** Modular valve
- 5** CETOP 5/NG10
- H** Hydrostat
- **** **2V** = 2 way
3V = 3 way
- P1** Function at port P
- 08** Differential pressure (Δp)
 Δp 8 bar
- **** **00** = No variant
V1 = Viton
- 2** Serial No.

