

## OPEN CENTER INLET MODULE FOR FIXED DISPLACEMENT PUMPS



Connector to be ordered separately, see page 103.

### ORDERING CODE


<b>FEH30</b>	Inlet module units with pressure relief valve
<b>P</b>	Electrical venting valve
<b>Q</b>	Pressure compensator element
<b>3</b>	Size
<b>3</b>	Ports G1/2"
<b>C</b>	Adjustment: <b>C</b> = Grub screw
<b>*</b>	Setting ranges: <b>1</b> = 35 ÷ 90 bar <b>2</b> = 75 ÷ 190 bar <b>3</b> = >150 bar
<b>*</b>	Voltage venting valve (1): <b>L</b> = 12 Vdc <b>M</b> = 24 Vdc <b>N</b> = 48 Vdc <b>0</b> = Without electrical venting valve (plugged)
<b>**</b>	Variants (1-2): <b>S1</b> = No variants <b>SV</b> = Viton <b>PY</b> = Push button emergency (3) <b>PS</b> = Rotary emergency (3) <b>AJ</b> = AMP Junior connection 22W (see page 104) <b>CX</b> = Deutsch connect. bidirectional diode (see page 104)
<b>2</b>	Serial No.

(1) Coils technical data, see page 104)  
Voltage codes are not stamped on the plate, their are readable on the coils  
(2) Connector to be ordered separately, see page 103;  
Other variants available on request.  
(3) Emergency (see page 60)

Open center inlet module units FEH30PQ for fixed displacement pumps with pressure relief valve CMP-MC/MS and electrical venting valve CRP04.

- Includes a pressure compensated load sensing signal bleed to minimize system losses even at high operating pressures. Signal bleed can be closed in case it not required.
- Manual adjustment with a grub screw.
- Threaded ports P-T sizes G1/2"
- Maximum flow 80 l/min.
- Cast iron zinc plated body.

### HYDRAULIC SYMBOL



"X" predisposition for LS bleed plug


### FEATURES

Max. operating pressure	300 bar
Setting ranges for pressure relief valve	Spring 1: 35 ÷ 90 bar Spring 2: 75 ÷ 190 bar Spring 3: >150 bar
Max. flow	80 l/min (see characteristic curves)
Fluid viscosity	10 ÷ 500 mm <sup>2</sup> /s
Max LS bleed flow	0.5 l/min*
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamination level (filter β <sub>25</sub> ≥ 75)	ISO 4406:1999: class 21/19/16 NAS 1638: class 10
Weight	2.9 kg
Max. excitation frequency	2 Hz
Duty cycle	100% ED
Type of protection (in relation to the connection used)	IP65


To obtain a correct compensation the inlet flow must be 8% greater the sum of the regulated flows

\* Bleed flow rate is subtracted to the energized valve working at the higher pressure. To avoid this behavior plug the bleed (see "X" on hydraulic scheme)

### CHARACTERISTIC CURVE

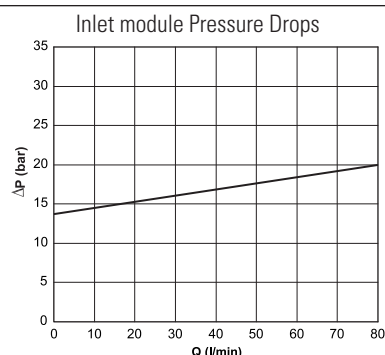


## OVERALL DIMENSIONS

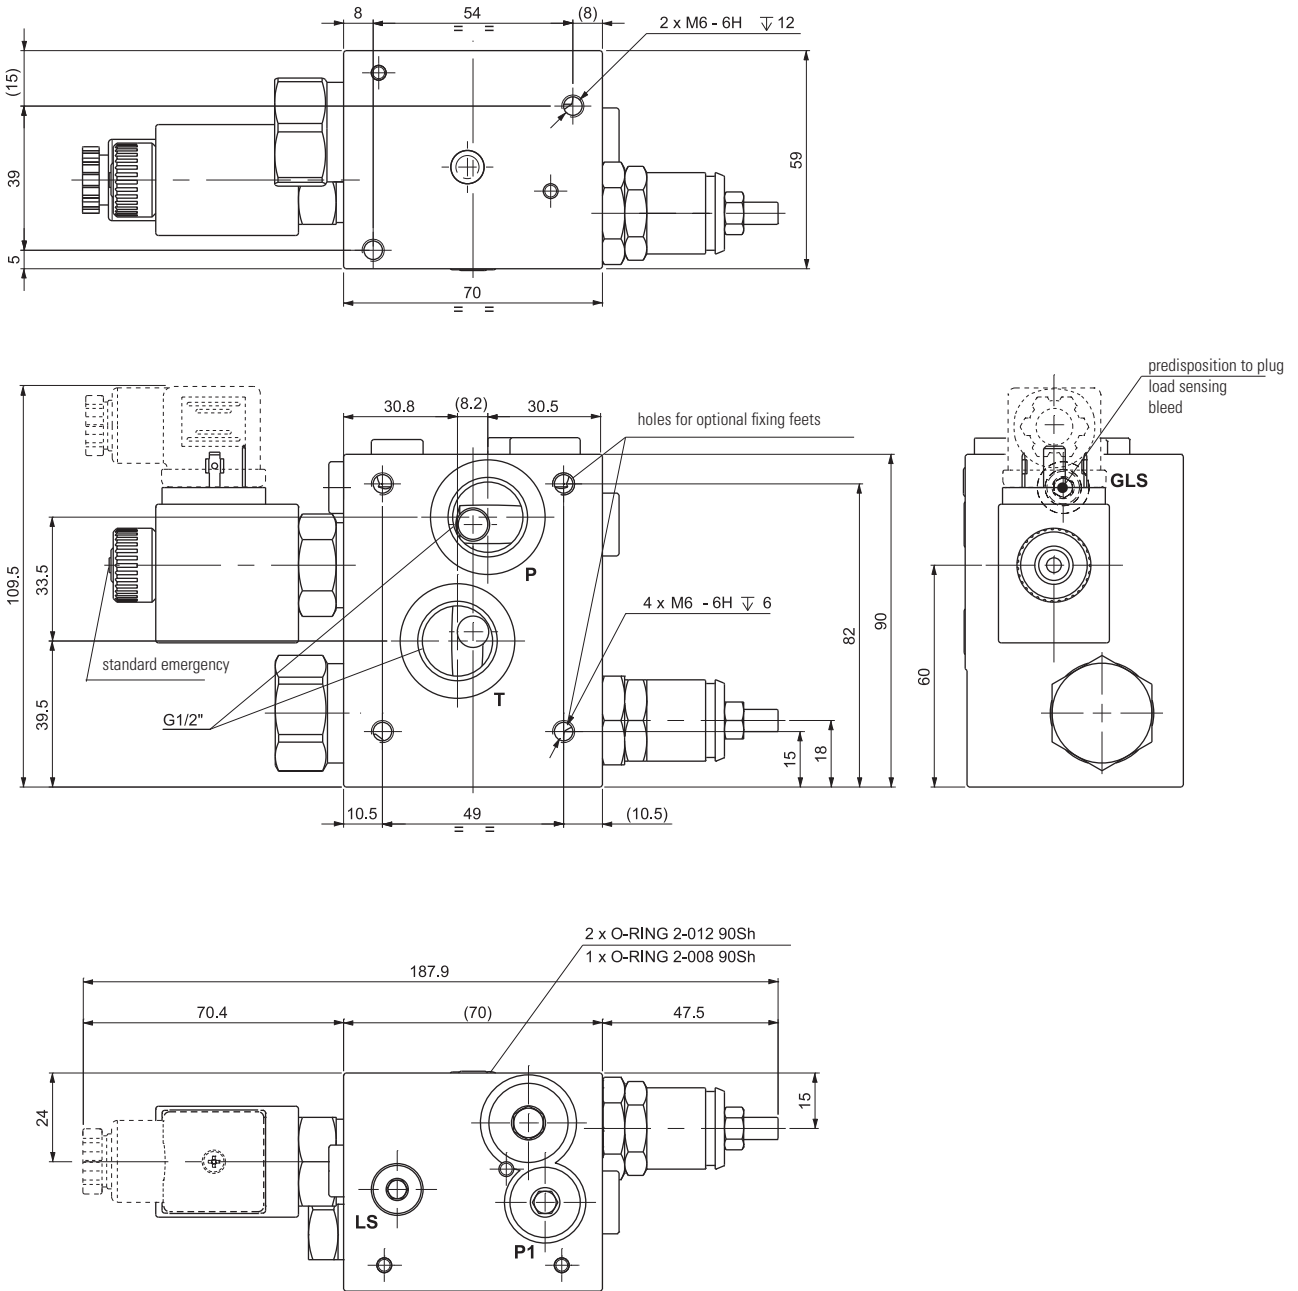


## VARIANTS


**"PS"**  
Emergency rotary



**"PY"**  
Emergency with push button



**"AJ"**  
AMP Junior



**"CX"**  
Deutsch with diode

